

alg SLIDE minimalista

Minimal sliding system of 65 / 75 mm frame with thermal break

Frame section size: **65 and 75 mm**

Sash section size: **35,6 x 70 mm**

Polyamide frame 30 mm strips PA66 with fiberglass

Polyamide sash 30 mm strips PA66 with fiberglass

Maximum weight per sash: **200 Kg**
(2 tandem per sash)

Maximum glazing: **28 mm**

**Please, consult maximum dimensions and weight*



Technical Specifications

Air permeability * **CLASS 3**

UNE EN 1026 - EN 12207

Water tightness * **CLASS 5A**

UNE EN 1027 - EN 12208

Wind resistance * **CLASS C3**

UNE EN 12211 - EN 12210

Thermal transmission * **1,6 W/(m² K)**

«Uw» Window
UNE EN ISO 10077-1

Thermal transmission **2,8 W/m² K**

«Uf» Frame (Q-lon)
UNE EN ISO 10077-2:2020

Thermal transmission **2,9 W/m² K**

«Uf» Frame (Tri-Fim)
UNE EN ISO 10077-2:2020





Accoustic insulation *** **34 (-1 ; -1)dB**

UNE EN 10140-2:2011

* 2 sash window of 1230 x 1640 mm.

** 2 sash window of 1600 x 2335 mm; glass Uw: 1 W/m K

*** 2 sash window of 1230 x 1480 mm.; glass 6+6Acústico-8-3+3Silence

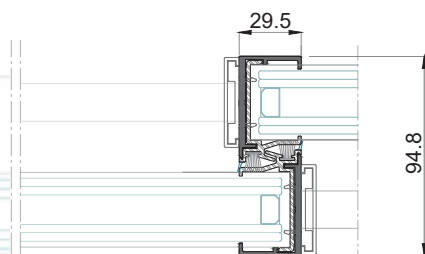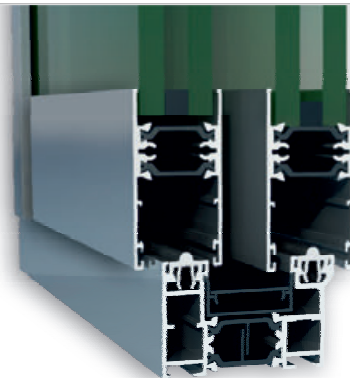



alg SLIDE perimetral

Sliding system of 65 / 75 mm frame with thermal break

Frame section size: **65 and 75 mm**

Sash section size: **35,6 x 70 mm**

Polyamide frame 30 mm strips PA66 with fiberglass

Polyamide sash 30 mm strips PA66 with fiberglass

Maximum weight per sash: **200 Kg**
(2 tandem per sash)

Maximum glazing: **28 mm**

**Please, consult maximum dimensions and weight*

Technical Specifications

Air permeability * **CLASS 4**

UNE EN 1026 - EN 12207

Water tightness * **CLASS 7A**

UNE EN 12211 - EN 12210

Wind resistance * **CLASS C5**

UNE EN 12211 - EN 12210

Thermal transmission ** **1,6 W/m² K**

«Uw» Window
UNE EN ISO 10077-1

Thermal transmission **2,8 W/m² K**

«Uf» Frame (Q-Ion)
UNE EN ISO 10077-2:2020

Thermal transmission **2,9 W/m² K**

«Uf» Frame (Tri-Fim)
UNE EN ISO 10077-2:2020

Acoustic insulation *** **34 (-1 ; -1)dB**

UNE EN 10140-2:2011

* 2 sash window of 1230 x 1640 mm.

** 2 sash window of 1600 x 2335 mm; glass Uv: 1 W/m K

*** 2 sash window of 1230 x 1480 mm.; glass 6+6Acústico-8-3+3Silence

